


# Cartridge

223 Rem - 34/35 grain

Version 9.0

# NOSLER®

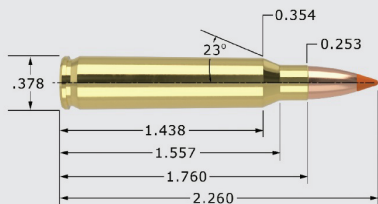

223 Rem - 34/35 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.260"	TESTED O.A.C.L.	B.C.	S.D.
Nosler®	<b>C&amp;D</b> 34gr. FBHP	2.080"	0.113	0.097
Ballistic Tip® Lead-Free	<b>BTLF</b> 35gr. Spitzer	2.260"	0.201	0.100

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	28.2 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>AA 5744</b>	21.5 MAX. 3576		88%
	20.5 3452		84%
	19.5 * 3328		79%
<b>RL7</b>	23.5 MAX. 3738		91%
	22.5 3622		87%
	21.5 * 3505		83%
<b>H322</b>	26.0 MAX. 3803		100%
	25.0 3737		96%
	24.0 * 3672		92%
<b>TAC</b> Most Accurate Powder Tested	28.5 MAX. 3829		** 103%
	27.5 * 3773		99%
	26.5 3717		95%
<b>IMR 4198</b>	22.5 * MAX. 3848		93%
	21.5 3689		88%
	20.5 3530		84%
<b>N133</b>	25.5 MAX. 3849		** 105%
	24.5 * 3656		** 101%
	23.5 3463		97%
<b>H335</b>	27.5 MAX. 3850		99%
	26.5 * 3751		95%
	25.5 3651		92%
<b>X-Terminator</b>	28.0 MAX. 3887		** 102%
	27.0 * 3803		98%
	26.0 3720		95%
<b>RL10x</b>	25.0 MAX. 3892		100%
	24.0 * 3710		96%
	23.0 3528		92%
<b>AA 2230</b>	28.5 MAX. 3920		** 103%
	27.5 3847		100%
	26.5 * 3775		96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load