


Cartridge

223 Rem - 55 grain

Version 9.0

NOSLER®

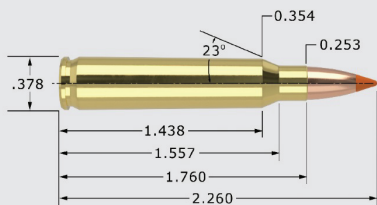

223 Rem - 55 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	55gr. Spitzer	2.260"	0.267	0.157
Expansion Tip®	ET	55gr. Spitzer	2.250"	0.305	0.157
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products. 55 grain E-Tip® requires a minimum 1-10" twist rate to reliably stabilize.					
Nosler®	CGD	55gr. FBHP	2.260"	0.210	0.157
Nosler®	CGD	55gr. FBSP	2.260"	0.218	0.157
Varmageddon®	VMG	55gr. FB Tipped	2.260"	0.255	0.157

CASE TYPE:	Nosler	PRIMER TYPE	Rem 7 1/2
CASE HOLDS:	27.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Varget	25.0	MAX.	3037	99%
	24.0		2921	95%
	23.0	*	2805	91%
H335	25.0	* MAX.	3140	93%
Most Accurate Powder Tested	24.0		3030	89%
	23.0		2920	85%
PP Varmint	26.0	* MAX.	3140	96%
	25.0		3018	92%
	24.0		2897	88%
W748	26.0	MAX.	3140	99%
	25.0		3060	95%
	24.0	*	2980	91%
N120	21.0	* MAX.	3149	93%
	20.0		3020	89%
	19.0		2892	85%
IMR 4895	25.5	* MAX.	3178	** 101%
	24.5		3083	97%
	23.5		2988	93%
N135	25.0	MAX.	3195	** 106%
	24.0		3091	** 102%
	23.0	*	2987	98%
TAC	26.0	MAX.	3243	96%
	25.0		3082	93%
	24.0	*	2920	89%
CFE 223	28.0	* MAX.	3292	** 102%
	27.0		3155	99%
	26.0		3018	95%
Benchmark	25.0	* MAX.	3308	99%
	24.0		3182	95%
	23.0		3056	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load