


Cartridge

223 Rem - 85 grain

Version 9.0

NOSLER®

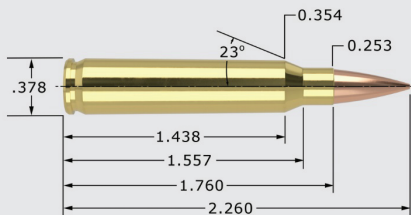

223 Rem - 85 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.			2.260"	TESTED O.A.C.L.	B.C.	S.D.	
Reduced Drag Factor™			RDF	85gr. HPBT	2.260"	0.498	0.242
CASE TYPE:	Nosler		PRIMER TYPE			WSR	
CASE HOLDS:	24.7	Gr. WATER	BARREL Length/Make			24" PAC-NOR	
			BARREL Twist			1-7"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
AA 2015	20.0	MAX.	2384	92%			
	19.0	*	2236	87%			
	18.0		2088	83%			
H335	22.0	* MAX.	2525	90%			
	21.0		2395	86%			
	20.0		2265	82%			
TAC	22.0	* MAX.	2541	90%			
	21.0		2432	86%			
	20.0		2323	82%			
W748	23.0	* MAX.	2542	97%			
	22.0		2392	93%			
	21.0		2242	89%			
Varget	22.0	MAX.	2571	96%			
	21.0	*	2485	92%			
	20.0		2399	88%			
N540	23.0	MAX.	2577	** 103%			
	22.0	*	2495	99%			
	21.0		2413	94%			
IMR 4064	22.5	* MAX.	2597	101%			
	21.5		2447	96%			
	20.5		2297	92%			
RL15	23.5	* MAX.	2608	99%			
	22.5		2472	95%			
	21.5		2336	91%			
H4895 Most Accurate Powder Tested	22.0	* MAX.	2622	98%			
	21.0		2491	93%			
	20.0		2360	89%			
CFE 223	24.0	MAX.	2654	97%			
	23.0	*	2527	93%			
	22.0		2399	89%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load