


Cartridge

280 Rem - 150 grain

Version 9.0

NOSLER®

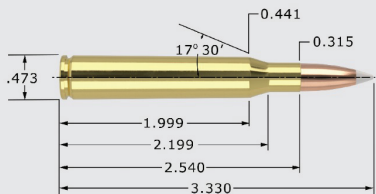

280 Rem - 150 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.330"	0.493	0.266
AccuBond® Long Range	ABLR	150gr. Spitzer	3.330"	0.546	0.266
Ballistic Tip®	BT	150gr. Spitzer	3.330"	0.493	0.266
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.330"	0.493	0.266
Expansion Tip®	ET	150gr. Spitzer	3.300"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.275"	0.456	0.266

CASE TYPE:	Nosler	PRIMER TYPE	Fed 210
CASE HOLDS:	62.5 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
IMR 4350	51.5 * MAX.	2865	[Bar]	88%	
	49.5	2753	[Bar]	85%	
	47.5	2641	[Bar]	81%	
Hunter	54.5 MAX.	2868	[Bar]	90%	
	52.5	2815	[Bar]	87%	
	50.5 *	2762	[Bar]	83%	
H4831SC	56.0 * MAX.	2888	[Bar]	93%	
	54.0	2793	[Bar]	90%	
	52.0	2698	[Bar]	87%	
N165	57.0 * MAX.	2906	[Bar]	** 101%	
	55.0	2795	[Bar]	98%	
	53.0	2684	[Bar]	94%	
RL22	54.5 MAX.	2932	[Bar]	95%	
	Most Accurate Powder Tested	52.5 *	2805	[Bar]	91%
		50.5	2679	[Bar]	88%
IMR 7828 SSC	57.0 MAX.	2936	[Bar]	94%	
	55.0 *	2817	[Bar]	91%	
	53.0	2698	[Bar]	87%	
RL17	52.0 MAX.	2965	[Bar]	86%	
	50.0	2862	[Bar]	83%	
	48.0 *	2759	[Bar]	80%	
IMR 4831	55.0 * MAX.	2977	[Bar]	94%	
	53.0	2858	[Bar]	91%	
	51.0	2739	[Bar]	87%	
RL19	55.0 MAX.	2997	[Bar]	96%	
	53.0	2858	[Bar]	92%	
	51.0 *	2718	[Bar]	89%	
Norma MRP	56.0 MAX.	3018	[Bar]	98%	
	54.0	2895	[Bar]	95%	
	52.0 *	2771	[Bar]	91%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load