


Cartridge

280 Rem - 168 grain

Version 9.0

NOSLER®

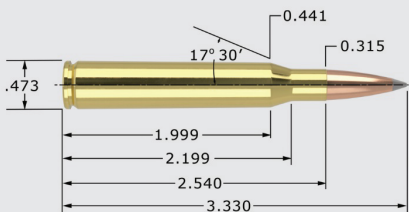

280 Rem - 168 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond® Long Range	ABLR	168gr. Spitzer	3.300"	0.616	0.298	
Custom Competition®	CC	168gr. HPBT	3.300"	0.520	0.298	
CASE TYPE:	Nosler		PRIMER TYPE	WLR		
CASE HOLDS:	62.9	Gr. WATER	BARREL Length/Make	26" Lilja		
			BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
Varget	42.0	MAX. 2514	72%			
	40.0 *	2424	69%			
	38.0	2334	65%			
H4831	54.0	MAX. 2585	89%			
	52.0 *	2503	86%			
	50.0	2421	83%			
Hybrid 100V	50.0 * MAX.	2662	82%			
	48.0	2579	79%			
	46.0	2495	75%			
IMR 4831	50.0	MAX. 2671	85%			
	48.0 *	2574	82%			
	46.0	2476	78%			
RL17	48.0	MAX. 2685	79%			
	46.0	2587	76%			
	44.0 *	2489	72%			
RL22	53.0	MAX. 2785	92%			
	Most Accurate	51.0	2697	88%		
	Powder Tested	49.0 *	2610	85%		
Magnum	60.0 * MAX.	2853	97%			
	58.0	2752	94%			
	56.0	2650	90%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load