


# Cartridge

280 Rem - 175 grain

Version 9.0

# NOSLER®

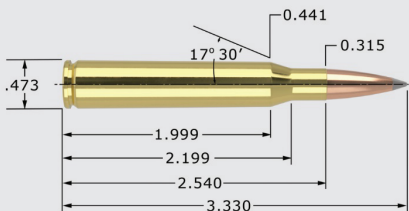

280 Rem - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.330"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b>	175gr. Spitzer	3.330"	0.648	0.310
Partition®	<b>PT</b>	175gr. Spitzer	3.330"	0.519	0.310
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210	
CASE HOLDS:	61.1	Gr. WATER	BARREL Length/Make	26" Lilja	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
<b>IMR 7828</b>	53.0	MAX. 2626		92%	
	51.0	2534		89%	
	49.0 *	2443		85%	
<b>IMR 4350</b>	49.0	MAX. 2631		86%	
	47.0	2524		82%	
	45.0 *	2417		79%	
<b>Magnum</b>	58.5	MAX. 2643		97%	
	56.5	2569		94%	
	54.5 *	2494		91%	
<b>N165</b> Most Accurate Powder Tested	53.0	MAX. 2661		96%	
	51.0	2564		93%	
	49.0 *	2468		89%	
<b>RL19</b>	51.5 *	MAX. 2709		92%	
	49.5	2610		88%	
	47.5	2512		85%	
<b>RL22</b>	52.5	MAX. 2717		93%	
	50.5 *	2607		90%	
	48.5	2498		86%	
<b>H1000</b>	56.5	MAX. 2724		98%	
	54.5	2652		94%	
	52.5 *	2580		91%	
<b>MAGPRO</b>	58.5	MAX. 2754		99%	
	56.5	2692		95%	
	54.5 *	2629		92%	
<b>IMR 4831</b>	52.5 *	MAX. 2760		92%	
	50.5	2653		88%	
	48.5	2546		85%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load