


# Cartridge

## 30-06 Sprg - 150/155 grain

Version 9.0

# NOSLER®

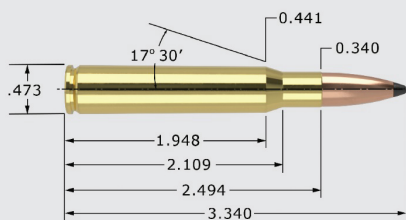

## 30-06 Sprg - 150/155 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	3.320"	0.435	0.226
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	3.320"	0.435	0.226
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	3.320"	0.435	0.226
Expansion Tip®	<b>ET</b>	150gr. Spitzer	3.300"	0.469	0.226
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	3.320"	0.387	0.226
Custom Competition®	<b>CC</b>	155gr. HPBT	3.320"	0.450	0.233

CASE TYPE:	Nosler		PRIMER TYPE	WLR	
CASE HOLDS:	62.7	Gr. WATER	BARREL Length/Make	24" Lilja	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4831</b>	59.0 * MAX.	2862	** 101%		
		2757	97%		
		2652	94%		
<b>IMR 4064</b>	52.0 * MAX.	2908	92%		
		2793	88%		
		2678	85%		
<b>W760</b>	57.0 * MAX.	2912	95%		
		2797	92%		
		2682	89%		
<b>IMR 4895</b>	51.0 * MAX.	2922	89%		
		2837	85%		
		2752	82%		
<b>N150</b>	54.0 MAX.	2939	** 101%		
		2848	98%		
	50.0 *	2756	94%		
<b>IMR 4320</b>	53.0 MAX.	2940	92%		
		2850	88%		
	49.0 *	2760	85%		
<b>RL19</b>	61.5 * MAX.	2983	** 107%		
	Most Accurate	2880	** 103%		
	Powder Tested	2777	100%		
<b>IMR 4350</b>	59.0 * MAX.	3000	** 101%		
		2880	97%		
		2760	94%		
<b>Big Game</b>	58.0 MAX.	3054	94%		
		2982	91%		
	54.0 *	2910	88%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load