


# Cartridge

30-06 Sprg - 165/168 grain

Version 9.0

# NOSLER<sup>®</sup>

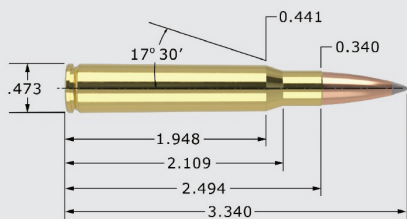

30-06 Sprg - 165/168 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond <sup>®</sup>	<b>AB</b>	165gr. Spitzer	3.320"	0.475	0.248
Ballistic Tip <sup>®</sup>	<b>BT</b>	165gr. Spitzer	3.320"	0.475	0.248
Partition <sup>®</sup>	<b>PT</b>	165gr. Spitzer	3.320"	0.410	0.248
AccuBond <sup>®</sup> Long Range	<b>ABLR</b>	168gr. Spitzer	3.320"	0.525	0.253
Ballistic Tip <sup>®</sup>	<b>BT</b>	168gr. Spitzer	3.320"	0.490	0.253
Bonded Solid Base <sup>®</sup>	<b>BSB</b>	168gr. PPT	3.100"	0.350	0.253
CT <sup>®</sup> Ballistic Silvertip <sup>®</sup>	<b>BST</b>	168gr. Spitzer	3.320"	0.490	0.253
Custom Competition <sup>®</sup>	<b>CC</b>	168gr. HPBT	3.320"	0.462	0.253
Expansion Tip <sup>®</sup>	<b>ET</b>	168gr. Spitzer	3.300"	0.503	0.253
Due to internal construction differences, always begin with starting loads when using Expansion Tip <sup>®</sup> products.					
Reduced Drag Factor <sup>™</sup>	<b>RDF</b>	168gr. HPBT	3.320"	0.505	0.253

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	60.2 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4320</b>	50.0 MAX.	2730	90%
	48.0	2620	87%
	46.0 *	2510	83%
<b>N160</b>	58.0 MAX.	2767	** 107%
	56.0	2664	** 103%
	54.0 *	2560	100%
<b>N150</b>	52.0 MAX.	2802	** 102%
	50.0	2717	98%
	48.0 *	2632	94%
<b>IMR 4831</b>	58.0 MAX.	2820	** 103%
	56.0	2710	99%
	54.0 *	2600	96%
<b>IMR 4350</b>	57.0 * MAX.	2832	** 101%
	Most Accurate	2717	98%
	Powder Tested	2602	94%
<b>Big Game</b>	55.5 MAX.	2859	94%
	53.5	2792	91%
	51.5 *	2725	87%
<b>H4350</b>	57.5 * MAX.	2872	** 101%
	55.5	2757	98%
	53.5	2642	94%
<b>W760</b>	56.0 MAX.	2879	97%
	54.0	2798	94%
	52.0 *	2717	90%
<b>RL17</b>	57.0 * MAX.	2909	98%
	55.0	2782	95%
	53.0	2655	91%
<b>RL22</b>	63.0 MAX.	3002	** 114%
	61.0	2907	** 110%
	59.0 *	2812	** 107%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load