


Cartridge

30-06 Sprg - 190 grain

Version 9.0

NOSLER®

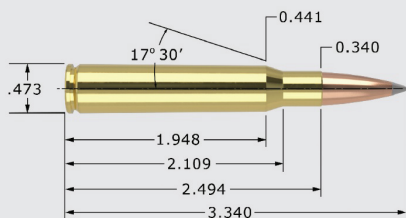

30-06 Sprg - 190 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	190gr. Spitzer	3.340"	0.597	0.286
Custom Competition®	CC	190gr. HPBT	3.330"	0.530	0.286
CASE TYPE:	Nosler	PRIMER TYPE	WLR		
CASE HOLDS:	62.7 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Hybrid 100V	52.0 MAX.	2624	85%		
	50.0 *	2536	82%		
	48.0	2449	79%		
PP 4000-MR	55.0 * MAX.	2658	92%		
	53.0	2548	89%		
	51.0	2438	86%		
H4350	53.5 MAX.	2662	90%		
	51.5 *	2565	87%		
	49.5	2469	84%		
RL19	56.5 MAX.	2671	98%		
	54.5 *	2551	94%		
	52.5	2431	91%		
IMR 7828 SSC	59.5 MAX.	2671	98%		
	57.5	2579	95%		
	55.5 *	2488	91%		
W760	53.5 MAX.	2686	89%		
	51.5 *	2561	86%		
	49.5	2437	83%		
RL22	60.0 * MAX.	2713	**	104%	
	58.0	2647	**	101%	
	56.0	2582	97%		
RL17	54.5 MAX.	2748	90%		
	52.5	2629	87%		
	50.5 *	2510	83%		
N560	61.0 * MAX.	2749	**	108%	
	59.0	2658	**	105%	
	57.0	2567	**	101%	
Norma MRP	58.5 MAX.	2770	**	103%	
Most Accurate	56.5 *	2661	99%		
Powder Tested	54.5	2552	96%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load