


Cartridge

30-06 Sprg - 210 grain

Version 9.0

NOSLER®

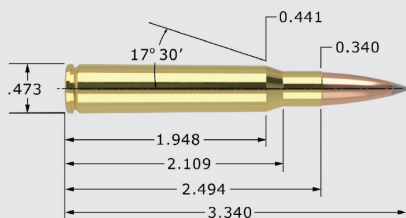

30-06 Sprg - 210 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"		TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	210gr. Spitzer		3.340"	0.661	0.316
Reduced Drag Factor™	RDF	210gr. HPBT		3.340"	0.707	0.316
CASE TYPE:	Nosler		PRIMER TYPE		WLR	
CASE HOLDS:	59.0	Gr.	WATER		BARREL Length/Make	
					24" Lilja	
					BARREL Twist	
					1-10"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Norma 204	55.0	MAX.	2573		**	104%
	53.0	*	2474			100%
	51.0		2375			96%
PP 4000-MR	54.5	MAX.	2576			97%
	52.5	*	2490			94%
	50.5		2404			90%
RL17	52.5	MAX.	2601			92%
	50.5	*	2485			89%
	48.5		2369			85%
IMR 4831	56.0	MAX.	2601		**	102%
	54.0	*	2508			98%
	52.0		2415			94%
AA 4350	56.0	MAX.	2608		**	107%
	54.0	*	2530		**	103%
	52.0		2452			99%
Norma URP	54.0	MAX.	2625		**	102%
	52.0	*	2521			98%
	50.0		2417			95%
Hunter	59.0	MAX.	2628		**	103%
	57.0	*	2577			100%
	55.0		2526			96%
Norma MRP	59.0	MAX.	2640		**	110%
	57.0	*	2565		**	106%
	55.0		2490		**	102%
N560	59.0	MAX.	2642		**	111%
	57.0	*	2552		**	107%
	55.0		2462		**	104%
RL22	57.5	MAX.	2652		**	106%
	55.5	*	2550		**	102%
	53.5		2447			99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load