


Cartridge

30-06 Sprg - 220 grain

Version 9.0

NOSLER®

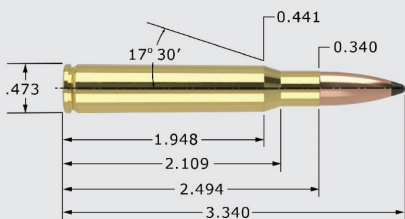

30-06 Sprg - 220 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	220gr. HPBT	3.340"	0.690	0.331
Partition®	PT	220gr. Semi-Spitzer	3.320"	0.351	0.331
CASE TYPE:	Nosler	PRIMER TYPE	WLR		
CASE HOLDS:	61.9 Gr. WATER	BARREL Length/Make	24" Lilja		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
W760	48.0 MAX.	2395	81%		
	46.0	2303	78%		
	44.0 *	2211	74%		
N165	56.5 MAX.	2431	** 101%		
	54.5	2353	98%		
	52.5 *	2275	94%		
H4831 Most Accurate Powder Tested	55.0 MAX.	2478	93%		
	53.0	2382	89%		
	51.0 *	2287	86%		
IMR 4350	51.5 * MAX.	2488	89%		
	49.5	2400	86%		
	47.5	2312	82%		
Hunter	54.5 MAX.	2492	91%		
	52.5 *	2423	87%		
	50.5	2355	84%		
N160	55.5 * MAX.	2503	100%		
	53.5	2415	96%		
	51.5	2327	92%		
IMR 7828	56.0 MAX.	2507	96%		
	54.0	2412	93%		
	52.0 *	2316	89%		
RL19	55.0 MAX.	2507	97%		
	53.0	2416	93%		
	51.0 *	2325	90%		
RL22	57.0 MAX.	2602	100%		
	55.0	2512	97%		
	53.0 *	2423	93%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load