


# Cartridge

## 7mm-08 Rem - 140 grain

Version 9.0

# NOSLER®

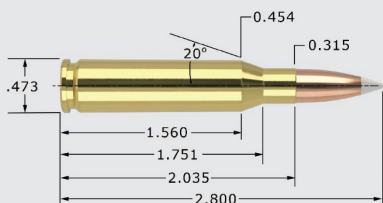

## 7mm-08 Rem - 140 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	140gr. Spitzer	2.800"	0.485	0.248
Ballistic Tip®	<b>BT</b>	140gr. Spitzer	2.800"	0.485	0.248
CT® Ballistic Silvertip®	<b>BST</b>	140gr. Spitzer	2.800"	0.485	0.248
Expansion Tip®	<b>ET</b>	140gr. Spitzer	2.770"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	140gr. Spitzer	2.800"	0.434	0.248

CASE TYPE:	Nosler		PRIMER TYPE	WLR
CASE HOLDS:	48.6	Gr. WATER	BARREL Length/Make	26" Wiseman
			BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>N150</b>	41.0 MAX.	2739	99%
	39.0	2626	94%
	37.0 *	2513	90%
<b>H335</b>	40.0 * MAX.	2742	84%
	38.0	2597	79%
	36.0	2452	75%
<b>AA 2520</b>	41.5 MAX.	2803	88%
	39.5	2675	84%
	37.5 *	2547	80%
<b>H414</b>	46.0 MAX.	2828	99%
	44.0	2683	94%
	42.0 *	2538	90%
<b>RL15</b>	41.5 MAX.	2831	89%
	39.5	2716	85%
	37.5 *	2600	80%
<b>IMR 4350</b>	46.0 * MAX.	2840	** 101%
	44.0	2720	97%
	42.0	2600	92%
<b>Varget</b>	42.0 MAX.	2845	93%
	40.0	2726	89%
	38.0 *	2606	85%
<b>IMR 4895</b>	41.0 MAX.	2862	92%
	39.0	2737	87%
	37.0 *	2612	83%
<b>RL19</b>	49.0 MAX.	2922	** 110%
	47.0	2807	** 105%
	45.0 *	2692	** 101%
<b>Big Game</b>	47.5 MAX.	2945	100%
Most Accurate	45.5	2848	96%
Powder Tested	43.5 *	2752	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load