


Cartridge

7mm-08 Rem - 150 grain

Version 9.0

NOSLER®

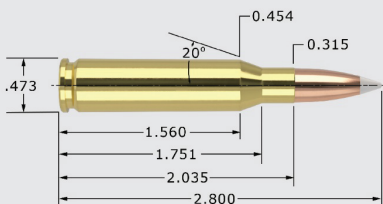

7mm-08 Rem - 150 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 150gr. Spitzer	2.800"	0.493	0.266
AccuBond® Long Range	ABLR 150gr. Spitzer	2.800"	0.546	0.266
Ballistic Tip®	BT 150gr. Spitzer	2.800"	0.493	0.266
CT® Ballistic Silvertip®	BST 150gr. Spitzer	2.800"	0.493	0.266
Expansion Tip®	ET 150gr. Spitzer	2.770"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	PT 150gr. Spitzer	2.800"	0.456	0.266

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	47.8 Gr. WATER	BARREL Length/Make	26" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	VELOCITY F.P.S.	LOAD DENSITY (VOLUME)
IMR 4350	44.5 MAX. 2692	[Bar]	100%
	42.5 2567	[Bar]	95%
	40.5 * 2442	[Bar]	91%
IMR 4831	46.0 * MAX. 2710	[Bar]	** 103%
	44.0 2580	[Bar]	98%
	42.0 2450	[Bar]	94%
Varget	41.0 * MAX. 2748	[Bar]	93%
	39.0 2627	[Bar]	88%
	37.0 2506	[Bar]	84%
IMR 4895	40.0 * MAX. 2750	[Bar]	91%
	38.0 2620	[Bar]	87%
	36.0 2490	[Bar]	82%
H380 Most Accurate Powder Tested	45.5 * MAX. 2750	[Bar]	100%
	43.5 2640	[Bar]	96%
	41.5 2530	[Bar]	91%
N160	48.0 MAX. 2788	[Bar]	** 112%
	46.0 2680	[Bar]	** 107%
	44.0 * 2571	[Bar]	** 102%
H414	46.0 MAX. 2800	[Bar]	100%
	44.0 2660	[Bar]	96%
	42.0 * 2520	[Bar]	92%
RL15	41.5 MAX. 2802	[Bar]	90%
	39.5 2657	[Bar]	86%
	37.5 * 2512	[Bar]	82%
RL19	48.5 MAX. 2862	[Bar]	** 110%
	46.5 2757	[Bar]	** 106%
	44.5 * 2652	[Bar]	** 101%
Hunter	49.5 MAX. 2867	[Bar]	** 107%
	47.5 2806	[Bar]	** 102%
	45.5 * 2746	[Bar]	98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load