


Cartridge

7mm-08 Rem - 160 grain

Version 9.0

NOSLER®

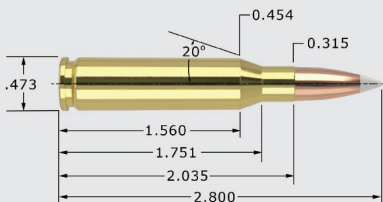

7mm-08 Rem - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	160gr. Spitzer	2.800"	0.531	0.283
Partition®	PT	160gr. Spitzer	2.800"	0.475	0.283
CASE TYPE:	Nosler		PRIMER TYPE	WLR	
CASE HOLDS:	47.6	Gr. WATER	BARREL Length/Make	26" Wiseman	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4895	38.0	MAX. 2570	87%		
	36.0	2450	82%		
	34.0 *	2330	78%		
Varget	39.0	MAX. 2596	89%		
	37.0 *	2489	84%		
	35.0	2382	79%		
RL15 Most Accurate Powder Tested	39.0	MAX. 2601	85%		
	37.0 *	2505	81%		
	35.0	2410	77%		
H414	44.5 *	MAX. 2650	97%		
	42.5	2520	93%		
	40.5	2390	89%		
IMR 4350	44.0	MAX. 2650	99%		
	42.0	2550	94%		
	40.0 *	2450	90%		
IMR 4831	46.0	MAX. 2680	** 103%		
	44.0	2560	99%		
	42.0 *	2440	94%		
H4350	44.5	MAX. 2682	99%		
	42.5	2557	94%		
	40.5 *	2432	90%		
N160	47.0	MAX. 2723	** 110%		
	45.0	2617	** 105%		
	43.0 *	2511	100%		
Hunter	49.0	MAX. 2759	** 106%		
	47.0 *	2689	** 102%		
	45.0	2620	97%		
RL19	47.5	MAX. 2780	** 108%		
	45.5	2660	** 104%		
	43.5 *	2540	99%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load