


Cartridge

7mm-08 Rem - 168 grain

Version 9.0

NOSLER®

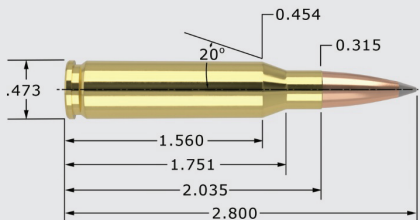

7mm-08 Rem - 168 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.800"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	168gr. Spitzer	2.770"	0.616	0.298
Custom Competition®	CC	168gr. HPBT	2.770"	0.520	0.298
CASE TYPE:	Nosler		PRIMER TYPE	WLR	
CASE HOLDS:	44.6	Gr. WATER	BARREL Length/Make	26" Pac-Nor	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4895	38.0 MAX.	2525	93%		
	36.0	2416	88%		
	34.0 *	2307	83%		
RL15 Most Accurate Powder Tested	39.0 * MAX.	2535	91%		
	37.0	2420	86%		
	35.0	2306	82%		
W748	40.0 MAX.	2587	93%		
	38.0	2452	89%		
	36.0 *	2316	84%		
BL-C(2)	41.0 MAX.	2594	93%		
	39.0 *	2480	89%		
	37.0	2367	84%		
Hybrid 100V	42.0 MAX.	2597	97%		
	40.0	2487	92%		
	38.0 *	2378	88%		
IMR 4451	44.5 * MAX.	2604	**	106%	
	42.5	2503	**	101%	
	40.5	2402		97%	
H380	42.5 * MAX.	2619		100%	
	40.5	2509		96%	
	38.5	2399		91%	
RL16	43.5 MAX.	2635	**	110%	
	41.5	2515	**	105%	
	39.5 *	2396		100%	
W760	44.0 MAX.	2636	**	103%	
	42.0 *	2508		99%	
	40.0	2380		94%	
IMR 4350	45.5 MAX.	2675	**	109%	
	43.5	2556	**	104%	
	41.5 *	2437		100%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load